


4" LIQUID FILLABLE INDUSTRIAL GAUGE



Dimensions(in.)

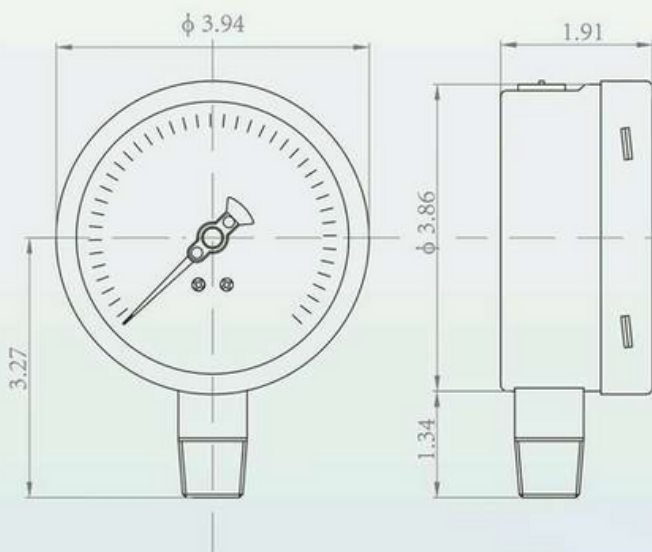

General Specifications

CASE: 304 Stainless steel.

RING: Stainless steel, internal rotation.

LENS: Tempered glass, Safety glass is optional.

DIAL: Aluminum, white finished with black markings.

POINTER: Aluminum, black, adjustable.

MOVEMENT: Stainless steel.

TUBE & SOCKET: 316L Stainless steel.

CONNECTION: 1/2" NPT or 1/4" NPT.

ACCURACY: ±1% Full Scale (ASME B40.100 Grade 1A).

PROCESS TEMPERATURE:

Dry: -40 to 250°F (-40 to 120°C),

Liquid Filled: 0 to 140°F (-18 to 60°C).

AMBIENT TEMPERATURE:

Dry: -40 to 140°F (-40 to 60°C),

Liquid Filled: 0 to 140°F (-18 to 60°C).

Liquid fillable industrial gauge	Model	
	ISEN-MGS18-100-__-__	
Range	—	6,10,16,25,.....
Connection	—	BSP,NPT,....

