




- **Type:**
Flange
- **Face to Face:**
API609, BS5155, DIN3202, ISO5752
- **Flange:**
DIN, BS, UNI, ISO, ANSI, AS, JIS
- **Mounting Flange:**
ISO5211
- **Working Pressure:**
PN16(200PSI)
- **Appliaction:**
HVAC, Water Supply&Sewage,
Food&Beverage, Chemical/
petrochemical/processing,
Power and Utilities, Paper
and Pulp, Ship Building.

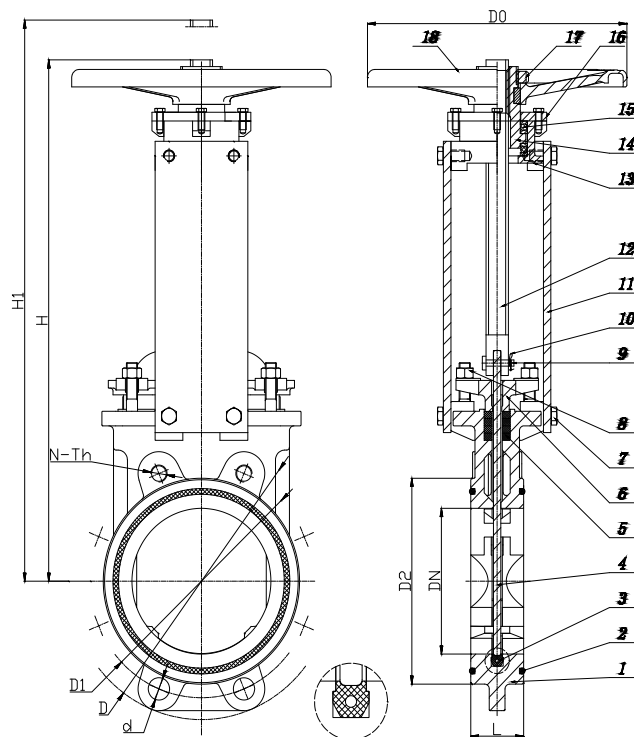

DIMENSIONS:(mm)

DN	SIZE								
	L	D	D1	D2	D0	N-Th	d	H	H1
65	48	185	145	118	180	4-M16	Ø18	335	415
80	51	200	160	132	220	8-M16	Ø18	360	455
100	51	220	180	156	240	8-M16	Ø18	400	515
125	57	250	210	184	240	8-M16	Ø18	455	595
150	57	285	240	212	280	8-M20	Ø23	510	675
200	60	340	295	266	300	12-M20	Ø23	585	805
250	70	405	355	319	320	12-M24	Ø27	695	965
300	76	460	410	370	320	12-M24	Ø27	765	1085

STANDARD MATERIALS OF MAIN PARTS

NO	PART NAME	MATERIAL
1	Body	Ductile Iron
2	Oring	NBR
3	Sealing	NBR/EPDM
4	Disc	316
5	Packing	PTFE
6	Gland	WCB
7	Bolt	201
8	Nut/Bolt	201
9	Pin	201
10	Split pin	200
11	Yoke	A3
12	Stem	2cr13
13	Yoke Head	WCB
14	Stem Nut	Brass
15	Bearing	Zchsnsb10-6
16	Yoke head cap	WCB
17	Nut	201
18	Handwheel	Ductile Iron