
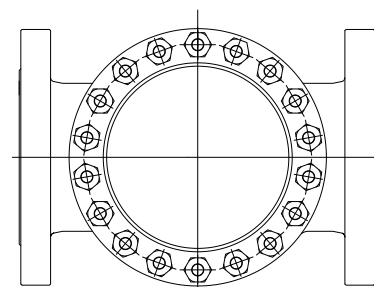


Model: VMIS(CC/CD)F16
Swing Check Valve

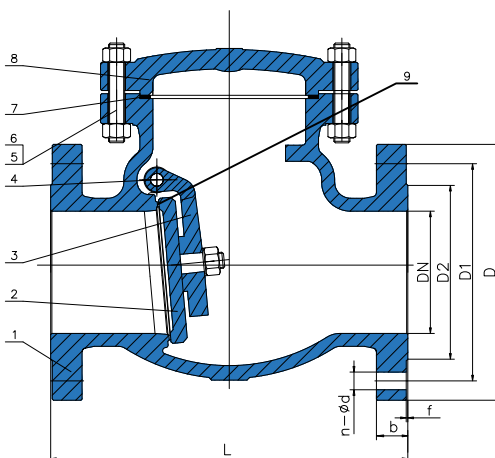

- **Type:**
Flange
- **Face to Face:**
API609, BS5155, DIN3202, ISO5752
- **Flange:**
DIN, BS, UNI, ISO, ANSI, AS, JIS
- **Mounting Flange:**
ISO5211
- **Working Pressure:**
PN16(200PSI)
- **Application:**
HVAC, Water Supply & Sewage,
Food & Beverage, Chemical/
petrochemical/processing,
Power and Utilities, Paper
and Pulp, Ship Building.

STANDARD MATERIALS OF MAIN PARTS

ITEM	PART NAME	MATERIAL
1	Body	CI/DI
2	Disc	CI/DI
3	Rocking Arm	DI
4	Pin	CS
5	Nut	CS
6	Stud	CS
7	Gasket	Graphite
8	Bonnet	DI
9	Sealing Ring	Brass

DIMENSIONS:(mm)

SIZE			PN16						PN10					
in	DN	DIN3202-F6	D	D1	n-Ød	D2	b	f	D	D1	n-Ød	D2	b	f
2	50	200	165	125	4-19	99	19	3	165	125	4-19	99	19	3
2.5	65	240	185	145	4-19	118	19	3	185	145	4-19	118	19	3
3	80	260	200	160	8-19	132	19	3	200	160	8-19	132	19	3
4	100	300	220	180	8-19	156	19	3	220	180	8-19	156	19	3
5	125	350	250	210	8-19	184	19	3	250	210	8-19	184	19	3
6	150	400	285	240	8-23	211	19	3	285	240	8-23	211	19	3
8	200	500	340	295	12-23	266	20	3	340	295	12-23	266	20	3
10	250	600	405	355	12-28	319	22	3	395	350	12-28	319	22	3
12	300	700	460	410	12-28	370	24.5	4	445	400	12-28	370	24.5	4
14	350	800	520	470	16-28	429	26.5	4	505	460	16-28	429	24.5	4
16	400	900	580	525	16-31	480	28	4	565	515	16-31	480	24.5	4
18	450	1000	640	585	20-31	548	30	4	615	565	20-31	530	25.5	4
20	500	1100	715	650	20-34	609	31.5	4	670	620	20-34	582	26.5	4
24	600	1300	840	770	20-37	720	36	5	780	725	20-37	682	30	5