
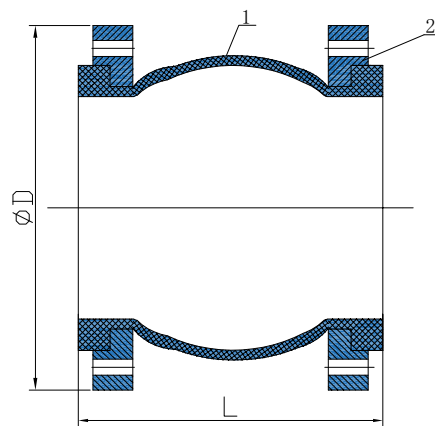


Model: VMIR(ES/ESS)F

Rubber Expansion Joint

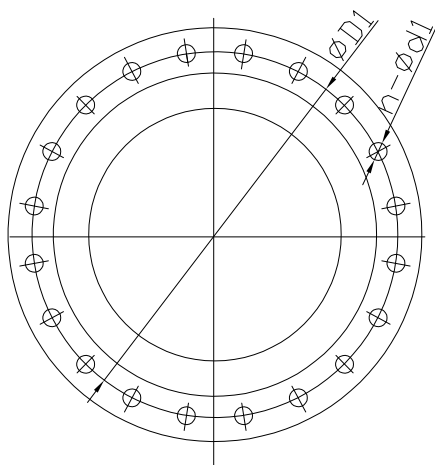

- **Type:**
Flange
- **Face to Face:**
API609, BS5155, DIN3202, ISO5752
- **Flange:**
DIN, BS, UNI, ISO, ANSI, AS, JIS
- **Mounting Flange:**
ISO5211
- **Working Pressure:**
PN16(200PSI)
- **Application:**
HVAC, Water Supply & Sewage,
Food & Beverage, Chemical/
petrochemical/processing,
Power and Utilities, Paper
and Pulp, Ship Building.

STANDARD MATERIALS OF MAIN PARTS

NO	PART NAME	MATERIAL
1	Sphere	EPDM/NBR
2	Flange	CS Coated With Zinc

DIMENSIONS:(mm)

SIZE		L	Pn16			Pn10			ANSI150		
in	DN		D	D1	n-d1	D	D1	n-d1	D	D1	n-d1
1.25	32	95	140	100	4-18	140	100	4-18	117	89	4-16
1.5	40	95	150	110	4-18	150	110	4-18	127	98.5	4-16
2	50	105	165	125	4-18	165	125	4-18	152	120.5	4-19
2.5	65	115	185	145	4-18	185	145	4-18	178	139.5	4-19
3	80	135	200	160	8-18	200	160	8-18	191	152.5	4-19
4	100	150	220	180	8-18	220	180	8-18	229	190.5	8-19
5	125	165	250	210	8-18	250	210	8-18	254	216	8-22
6	150	180	285	240	8-23	285	240	8-23	279	241.5	8-22
8	200	210	340	295	12-23	340	295	8-23	343	298.5	8-22
10	250	230	405	355	12-27	395	350	12-23	406	362	12-25
12	300	245	460	410	12-27	445	400	12-23	483	432	12-25
14	350	255	520	470	16-27	505	460	16-23	533	476	12-29
16	400	255	580	525	16-30	565	515	16-27	597	539.5	16-29
18	450	255	640	585	20-30	615	565	20-27	635	578	16-35
20	500	255	715	650	20-33	670	620	20-27	699	635	20-32
24	600	260	840	770	20-36	780	725	20-30	813	749.5	20-35