


3" or 4" or 5" BIMETAL THERMOMETER



Dimensions(in.)

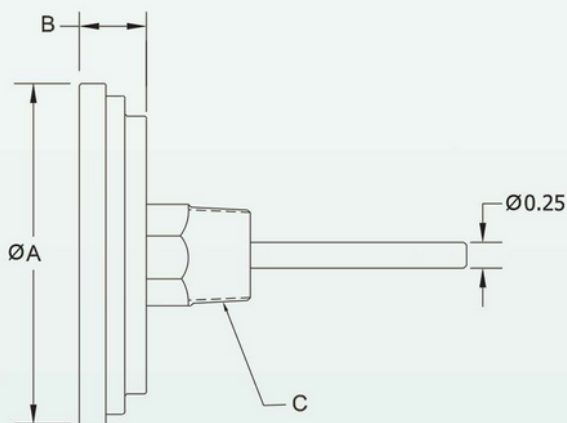

General Specifications

CASE & RING: Hermetically sealed 300 series stainless steel.

LENS: Double strength glass standard, with polycarbonate (250°F maximum range) optional.

DIAL: Aluminum with white finish and black markings.

POINTER: Black.

RECALIBRATOR: Furnished standard with external recalibrator on rear of case.

CONNECTION: 1/4" NPT , 1/2" NPT .

STEM: 300 series stainless steel, Φ 0.250".

ACCURACY: $\pm 1\%$ full range (ASME B40.3 Grade A)

AMBIENT TEMPERATURE: -40 to 250°F (-40 to 120°C),