


3" or 4" or 5" BIMETAL THERMOMETER



Dimensions(in.)

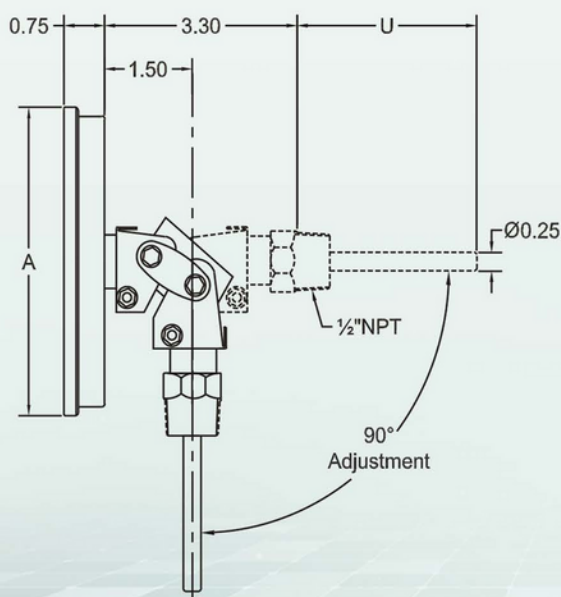

General Specifications

CASE & RING: 300 series stainless steel.
 LENS: Double strength glass standard, with polycarbonate (250°F maximum range) optional.
 DIAL: Aluminum with white finish and black markings.
 POINTER: Black.
 RECALIBRATOR: Furnished standard with external recalibrator on rear of case.
 CONNECTION: 1/4" NPT, 1/2" NPT.
 STEM: 300 series stainless steel, Φ 0.250".
 ACCURACY: $\pm 1\%$ full range (ASME B40.3 Grade A)
 AMBIENT TEMPERATURE: -40 to 250°F (-40 to 120°C),