



DIN CHECK VALVE

Model:VH41H

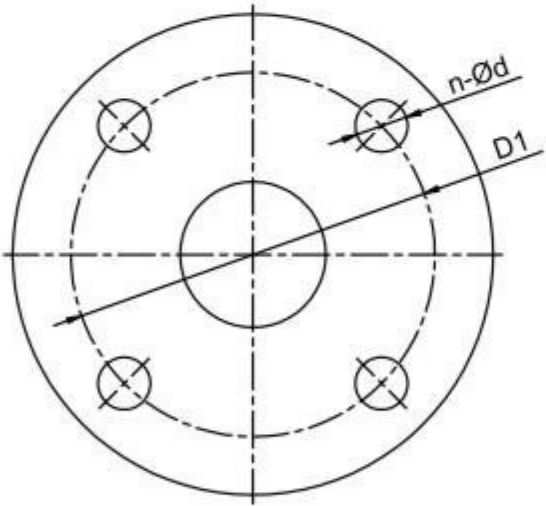

- 1. The new structure valve body adopts German coated sand casting technology. It greatly improving the surface smoothness and mechanical performance, reducing pores, sand holes and cracks.
- 2. Soft sealing disc can provide better seal performance in no leakage requirement.
- 3. Spring can be selected in corrosion resistant material in different working condition. In low working pressure, the spring provide seal strength and ensure seal performance.
- 4. Simple structure, the disc is only moving spare part, metal seat with less wear out, nearly no maintenance.

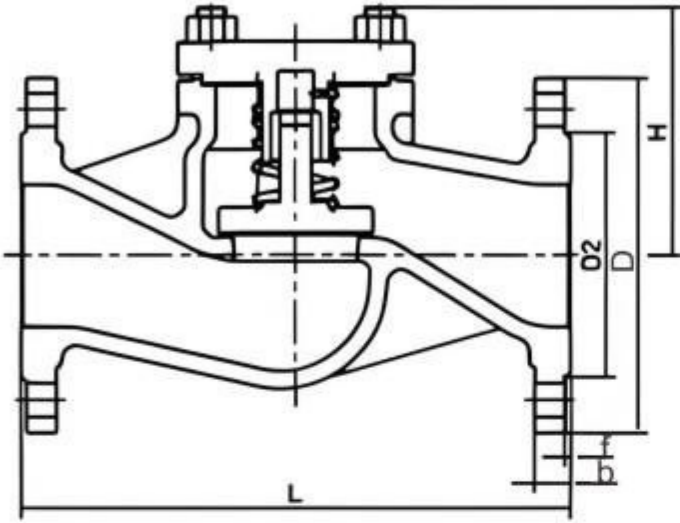

TECHNICAL SPECIFICATION

Design standard: EN12516, GB/T12224
 Face to face: EN558, GB/T12221
 Connection standard: EN1092, GB/T9124.1, HG/T20592
 Test and inspection: EN12266, GB/T26480

APPLICATION

Steam, hot and cold water, oil etc.

NAME	MATERIAL
Body	GS-C25, CF8, CF8M, CF3M
Seat	13Cr, SS304, SS316, STL
Disc	13Cr, F304, F316+STL
Spring	SS304, SS316
Sleeve	SS304, BRASS
Gasket	GRAPHITE+SS304, PTFE
Cover	GS-C25, CF8, CF8M, CF3M, GG40
Nut	ASTM A194-2H, A194-8
Bolt	ASTM A193-B7, A194-B8

TEST SPECIFICATION			
Test	Strength	1.5PN	MPa
	Seat Seal	1.1PN	
	Gas Seal	0.6	
Temperature		-196℃~600℃	

DN	L	D	D1	D2	b	f	n-φd	H
PN16								
15	130	95	65	45	16	2	4-φ14	78
20	150	105	75	58	18	2	4-φ14	82
25	160	115	85	68	18	2	4-φ14	91
32	180	140	100	78	18	2	4-φ18	95
40	200	150	110	88	18	3	4-φ18	101
50	230	165	125	102	18	3	4-φ18	109
65	290	185	145	122	18	3	4-φ18	119
80	310	200	160	138	20	3	8-φ18	139
100	350	220	180	158	20	3	8-φ18	155
125	400	250	210	188	22	3	8-φ18	192
150	480	285	240	212	22	3	8-φ22	220
200	600	340	295	268	24	3	12-φ22	303
250	730	405	355	320	26	3	12-φ26	346
300	850	460	410	378	28	4	12-φ26	387
350	980	520	470	438	30	4	16-φ26	441
400	1100	580	525	490	32	4	16-φ30	570
PN25								
15	130	95	65	45	16	2	4-φ14	78
20	150	105	75	58	18	2	4-φ14	82
25	160	115	85	68	18	2	4-φ14	91
32	180	140	100	78	18	2	4-φ18	95
40	200	150	110	88	18	3	4-φ18	101
50	230	165	125	102	20	3	4-φ18	109
65	290	185	145	122	22	3	8-φ18	119
80	310	200	160	138	24	3	8-φ18	139
100	350	235	190	162	24	3	8-φ22	155
125	400	270	220	188	26	3	8-φ26	192
150	480	300	250	218	28	3	8-φ26	220
200	600	360	310	278	30	3	12-φ26	303
250	730	425	370	335	32	3	12-φ30	346
300	850	485	430	395	34	4	16-φ30	387
350	980	555	490	450	38	4	16-φ33	441
400	1100	620	550	505	40	4	16-φ36	570
PN40								
15	130	95	65	45	16	2	4-φ14	78
20	150	105	75	58	18	2	4-φ14	82
25	160	115	85	68	18	2	4-φ14	91
32	180	140	100	78	18	2	4-φ18	95
40	200	150	110	88	18	3	4-φ18	101
50	230	165	125	102	20	3	4-φ18	109
65	290	185	145	122	22	3	8-φ18	119
80	310	200	160	138	24	3	8-φ18	139
100	350	235	190	162	24	3	8-φ22	155
125	400	270	220	188	26	3	8-φ26	192
150	480	300	250	218	28	3	8-φ26	220
200	600	375	320	285	34	3	12-φ30	303
250	730	450	385	345	38	3	12-φ33	346
300	850	515	450	410	42	4	16-φ33	387
350	980	580	510	465	46	4	16-φ36	441
400	1100	660	585	535	50	4	16-φ39	570



All your process control needs

Valvelink Co., Ltd. (VIETNAM)

Address: 399 Nguyen Thi Kieu Street, Tan Thoi Hiep Ward, Ho Chi Minh City, Vietnam

Hotline: +84 933 603 406

WhatsApp: +84 979128773

Email: contact@valvelink.vn / tech@valvelink.vn

Website: valvelink.vn

Valvelink Europe Ent (EUROPE)

Address: Via Roma 108, Cassina de Pecchi, 20060, Milan, Italy

Hotline: +90-2123818702

WhatsApp: +84 979128773 / +84 933 603 406

Email: sales@valvelink.eu

Website: valvelink.eu

Website



WhatsApp



Valvelink Sdn Bhd (ASEAN)

Address: 1-20-02, M-City Ampang, Jalan Ampang, 57450 Kuala Lumpur, Malaysia

Hotline: +60-173700361

WhatsApp: +84 979128773 / +84 933 603 406

Email: sales@valvelink.asia

Website: valvelink.asia

Boon (tianjin) Environment Technology Industry Co.,Ltd. (CHINA)

Address: Unit B, 1F, Building A, No. 5 Ziyang Road, Nankai District, Tianjin, China

Hotline: +84 979128773

WhatsApp: +84 933 603 406

Email: sales@valvelink.asia

Website: valvelink.com.cn