



DIN Y STRAINER

Model:VYSD16

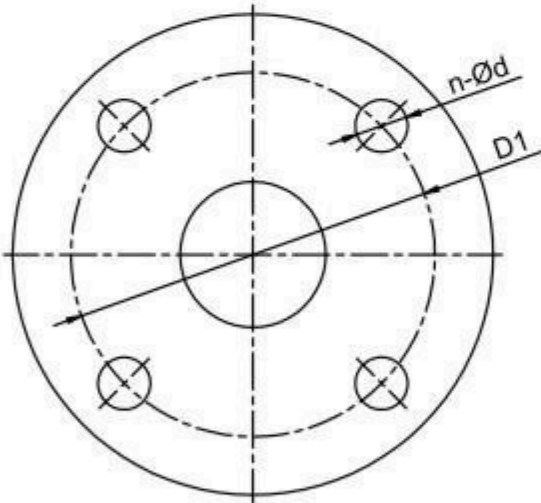

- 1. DIN Y strainer can remove impurities of media and protect the downstream valves and equipment.
- 2. Two layer stainless steel screen with good filtration and corrosion resistance.
- 3. Simple maintenance, clean the screen and reinstall.

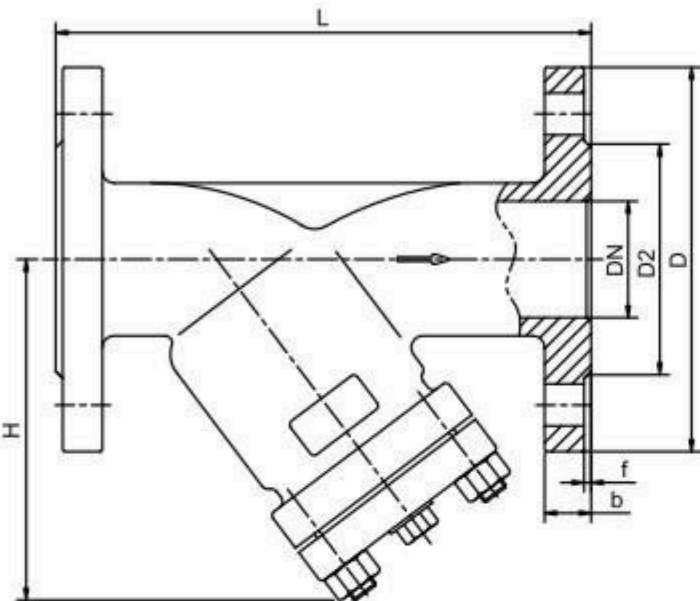

TECHNICAL SPECIFICATION

Design standard: EN12516, GB/T12224
Face to face: EN558, GB/T12221
Connection standard: EN1092, GB/T9124.1, HG/T20592
Test and inspection: EN12266, GB/T26480

APPLICATION

Steam, hot and cold water, oil etc.

NAME	MATERIAL
Body	GS-C25, WCB, CF8, CF8M
Screen	SS304, SS316
Gasket	GRAPHITE+SS, PTFE
Cover	GS-C25, WCB, CF8, CF8M
Nut	ASTM A194-2H, A194-8
Bolt	ASTM A193-B7, A193-B8

TEST SPECIFICATION			
PN			
Test	Strength	1.5xPr	Mpa
Temperature		-196℃~600℃	

SCREEN MESH	
Water	20-40
Gas	40-100
Oil	10-120

DN	L	D	D1	D2	b	f	n-φd	H
PN16								
15	130	95	65	45	16	2	4-φ14	85
20	150	105	75	58	18	2	4-φ14	95
25	160	115	85	68	18	2	4-φ14	110
32	180	140	100	78	18	2	4-φ18	125
40	200	150	110	88	18	3	4-φ18	145
50	230	165	125	102	18	3	4-φ18	155
65	290	185	145	122	18	3	4-φ18	175
80	310	200	160	138	20	3	8-φ18	210
100	350	220	180	158	20	3	8-φ18	230
125	400	250	210	188	22	3	8-φ18	270
150	480	285	240	212	22	3	8-φ22	300
200	600	340	295	268	24	3	12-φ22	385
250	730	405	355	320	26	3	12-φ26	535
300	850	460	410	378	28	4	12-φ26	680
PN25								
15	130	95	65	45	16	2	4-φ14	85
20	150	105	75	58	18	2	4-φ14	95
25	160	115	85	68	18	2	4-φ14	110
32	180	140	100	78	18	2	4-φ18	125
40	200	150	110	88	18	3	4-φ18	145
50	230	165	125	102	20	3	4-φ18	155
65	290	185	145	122	22	3	8-φ18	175
80	310	200	160	138	24	3	8-φ18	210
100	350	235	190	162	24	3	8-φ22	230
125	400	270	220	188	26	3	8-φ26	270
150	480	300	250	218	28	3	8-φ26	300
200	600	360	310	278	30	3	12-φ26	385
250	730	425	370	335	32	3	12-φ30	535
300	850	485	430	395	34	4	16-φ30	680
PN40								
15	130	95	65	45	16	2	4-φ14	85
20	150	105	75	58	18	2	4-φ14	95
25	160	115	85	68	18	2	4-φ14	110
32	180	140	100	78	18	2	4-φ18	125
40	200	150	110	88	18	3	4-φ18	145
50	230	165	125	102	20	3	4-φ18	155
65	290	185	145	122	22	3	8-φ18	175
80	310	200	160	138	24	3	8-φ18	210
100	350	235	190	162	24	3	8-φ22	230
125	400	270	220	188	26	3	8-φ26	270
150	480	300	250	218	28	3	8-φ26	300
200	600	375	320	285	34	3	12-φ30	385
250	730	450	385	345	38	3	12-φ33	535
300	850	515	450	410	42	4	16-φ33	680



All your process control needs

Valvelink Co., Ltd. (VIETNAM)

Address: 399 Nguyen Thi Kieu Street, Tan Thoi Hiep Ward, Ho Chi Minh City, Vietnam

Hotline: +84 933 603 406

WhatsApp: +84 979128773

Email: contact@valvelink.vn / tech@valvelink.vn

Website: valvelink.vn

Valvelink Europe Ent (EUROPE)

Address: Via Roma 108, Cassina de Pecchi, 20060, Milan, Italy

Hotline: +90-2123818702

WhatsApp: +84 979128773 / +84 933 603 406

Email: sales@valvelink.eu

Website: valvelink.eu

Website



WhatsApp



Valvelink Sdn Bhd (ASEAN)

Address: 1-20-02, M-City Ampang, Jalan Ampang, 57450 Kuala Lumpur, Malaysia

Hotline: +60-173700361

WhatsApp: +84 979128773 / +84 933 603 406

Email: sales@valvelink.asia

Website: valvelink.asia

Boon (tianjin) Environment Technology Industry Co.,Ltd. (CHINA)

Address: Unit B, 1F, Building A, No. 5 Ziyang Road, Nankai District, Tianjin, China

Hotline: +84 979128773

WhatsApp: +84 933 603 406

Email: sales@valvelink.asia

Website: valvelink.com.cn