


Model: VMI(YD/YS/YSS)F10

Y-Strainer



- **Type:**
Flange
- **Face to Face:**
API609, BS5155, DIN3202, ISO5752
- **Flange:**
DIN, BS, UNI, ISO, ANSI, AS, JIS
- **Mounting Flange:**
ISO5211
- **Working Pressure:**
PN16(200PSI)
- **Appliation:**
HVAC, Water Supply & Sewage,
Food & Beverage, Chemical/
petrochemical/processing,
Power and Utilities, Paper
and Pulp, Ship Building.

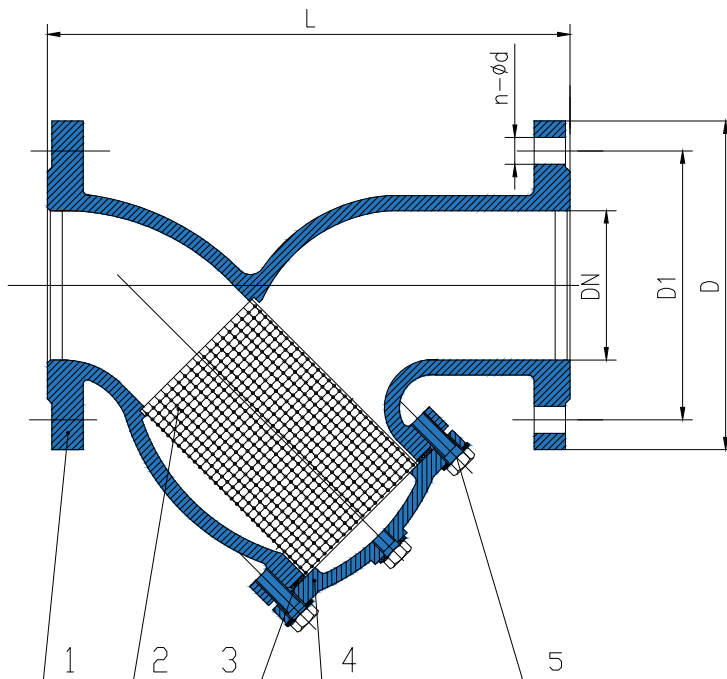

STANDARD MATERIALS OF MAIN PARTS

ITEM	PART NAME	MATERIAL
1	BOLT	CS
2	BONNET	DI
3	SEATING	RUBBER
4	SCREEN	Ss304
5	BODY	DI

DIMENSIONS:(mm)

DN	F1	DIN PN16			DIN PN10		
	L	D	D1	n-Ød	D	D1	n-Ød
50	230	165	125	4-19	165	125	4-19
65	290	185	145	4-19	185	145	4-19
80	310	200	160	8-19	200	160	8-19
100	350	220	180	8-19	220	180	8-19
125	400	250	210	8-19	250	210	8-19
150	480	285	240	8-23	285	240	8-23
200	600	340	295	12-23	340	295	8-23
250	730	405	355	12-28	395	350	12-23
300	850	460	410	12-28	445	400	12-23
350	980	520	470	16-28	505	460	16-23
400	1100	580	525	16-31	565	515	16-28
450	1200	640	585	20-31	615	565	20-28
500	1250	715	650	20-34	670	620	20-28