


Model: VMI(BD/BC)F

Ball Valve



- **Type:**
Flange
- **Face to Face:**
API609, BS5155, DIN3202, ISO5752
- **Flange:**
DIN, BS, UNI, ISO, ANSI, AS, JIS
- **Mounting Flange:**
ISO5211
- **Working Pressure:**
PN16(200PSI)
- **Appliaction:**
HVAC, Water Supply & Sewage,
Food & Beverage, Chemical/
petrochemical/processing,
Power and Utilities, Paper
and Pulp, Ship Building.

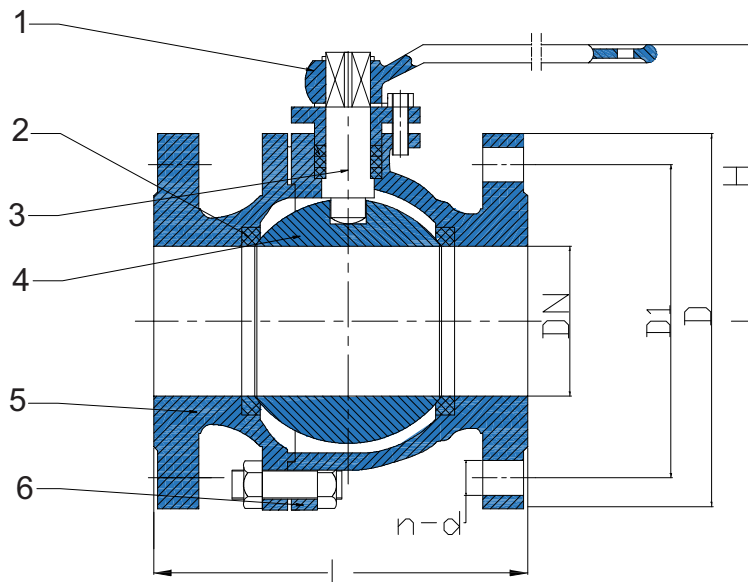

STANDARD MATERIALS OF MAIN PARTS

NO	PART NAME	MATERIAL
1	Bonnet	CI/DI
2	Body	CI/DI
3	Ball	SS
4	Stem	Ss410
5	Seat	PTFE
6	Hand lever	CI/DI

DIMENSIONS:(mm)

DN	15	20	25	32	40	50	65	80	100	125	150	200
	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2.5"	3"	4"	5"	6"	8"
L	115	120	125	130	140	150	170	180	190	325	350	400
H	59	63	75	86	105	115	135	155	170	195	240	295
D	95	105	115	140	150	165	185	200	220	250	285	340
D1	65	75	85	100	110	125	145	160	180	210	240	295
n-d	4-15	4-15	4-15	4-19	4-19	4-19	4-19	8-19	8-19	8-19	8-23	12-23